

# MEDIUM POWER



- Full protective enclosed design provide safty protection aviod laser radiation and mechanical movement.
- Exchange tables save material loading time.

## Technical Parameters

Model type	GF1530JH/GF1540JH/GF1560JH/GF2040JH/GF2060JH
Cutting area	1500mm*3000mm;1500mm*4000mm;1500mm*6000mm; 2000mm*4000mm;2000mm*6000mm;
Laser power	1500W-3000W/4000W-8000W
Acceleration speed	120m/min
Max idle speed	1.2g
Position accuracy	0.05mm
Repeat position accuracy	0.03mm




## Samples



**01**  
The HD monitoring window allows the operator to take into account both cutting and operation interface, real-time dynamic monitoring of the whole process.



**02**  
Durable Compressive Aviation aluminum beam in good dynamic performance ensures high accelerating speed.

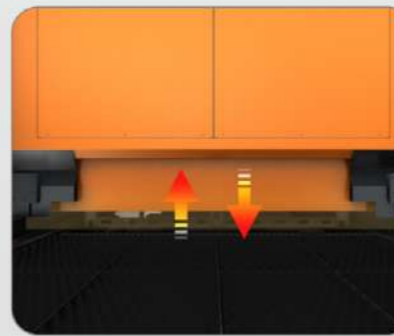

**03**  
A fully enclosed design avoids laser radiation or mechanical movement and improves personal safety protection.



**04**  
The high damping bed with Gantry double-drive structure is good rigidity, faster speed and acceleration speed.