

eXchange "X" series

X3plus

Exchange table fiber laser cutting machine



Technical Parameters

Processing format: 1500mm*3000mm

Laser power: 1500W~6000W

Positioning accuracy: 0.05mm

Repositioning accuracy: 0.03mm

Maximum positioning speed: 160m/min

Maximum acceleration: 2.0g

- ✔ This is the high cost-effective laser equipment, which meets both plate and pipe cutting functions
- ✔ The fully enclosed design avoid laser radiation or mechanical movement damage and improve personal safety protection

Simples




Main Features




01
The HD monitoring window allows the operator to take into account both cutting and operation interface, real-time dynamic monitoring of the whole process.



02
Durable Compressive Aviation aluminum beam in good dynamic performance ensures high accelerating speed.

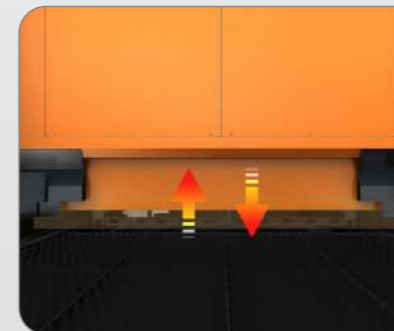

03
A fully enclosed design avoids laser radiation or mechanical movement and improves personal safety protection.

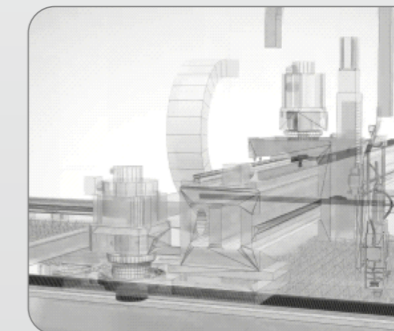

04
The high damping bed with Gantry double-drive structure is good rigidity, faster speed and acceleration speed.